

PLIZARTOWER

Cylindrical pole up to 10.5 m high, with fixing clamps for MIZAR luminaires, with flush trapdoor and flat base plate with gussets.



Pole materials

- Shaft: structural steel tube.
- Flange plate: steel plate, with gussets.
- Luminaire attachment clamps: cast aluminium.

Pole finish

Hot dip galvanised and painted.

Pole IP/IK

IP 3X

To achieve IP44, use of an internal junction box with IP44 is necessary (not supplied with the pole).
IK 10

Luminaire attachment

Lateral fixing using clamp with 3/4"G coupling in the horizontal position, specifically for MIZAR luminaires. The clamp allows the luminaire to be oriented over 360° in the vertical and horizontal axes.

Notes

Supplied with fixing bolts and template.
Luminaires not included.

TECHNICAL DATA SHEET

FINISH

standard: GYTECH

SHAFT

cylindrical, galvanised

TRAPDOOR



1 or 2 flush trapdoors
1 door for 210 models
2 doors for 310 models

CERTIFICATION

conforms to: EN 40-5 STANDARD

TECHNICAL DATA

HEIGHT	ØD	DOOR			FLANGE PLATE		BOLTS	
		X	Y	Z	A	B	Metric	Length
8.500	152	100	300	550	285	400	M22	600
10.500	168	100	300	550	285	400	M22	600

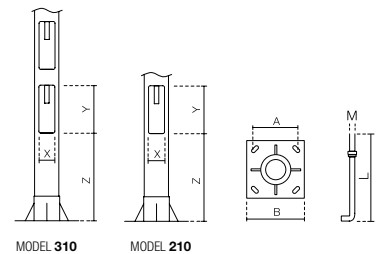

PLIZAR TOWER MODELS


MODEL	H	LUMINAIRE 1	LUMINAIRE 2	LUMINAIRE 3	CODE
		H1	H2	H3	
210	8500	7000	8000	—	5-640952-012
210	10500	9000	1000	—	5-640962-012
310	8500	6000	7000	8000	5-640953-012
310	10500	8000	9000	10000	5-640963-012

LUMINAIRES


MIZAR
Istanium® LED
page 188



MIZAR page 191

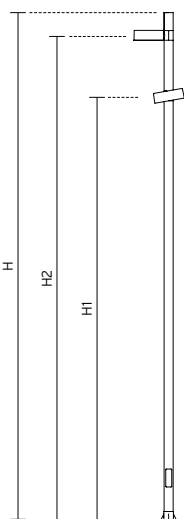

PLIZAR TOWER **210**
with MIZAR luminaires

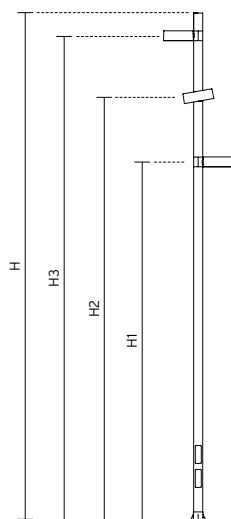

PLIZAR TOWER **310**
with MIZAR luminaires