

DIMMING REQUEST WITHOUT CONTROL LINE, CUSTOM PROGRAM

General project information

Project name		Contact person	
Town		Telephone	
Order number		E-mail	
Order Date			
Number of luminaires*		* Minimum of 25 luminaires to request Dimming without control line with Dxxx custom program	

Luminaire features

Depending on Offer Code Configurator

Model	Diffuser	Wired	Optics	Colour temperature	Power Optical group	Control gear	Dimming	Electrical protection	Finish


Dimming and Programming Curve

Dimming without control line, Dxxx custom programmed (PAM)
 Space to draw night-time dimming curve. Assumes 12 night-time hours at equinoxes.

- Restrictions on dimming curve design:
- Maximum of 5 dimming levels.
 - Minimum dimming level: 10% of rated current or 150 mA
 - Minimum time step: 30 minutes.

Choose the mode for adapting programming to the astronomical time:

- From the midnight point. Obligatory for solar lighting points. Programming is shortened or lengthened at both ends of the schedule.*

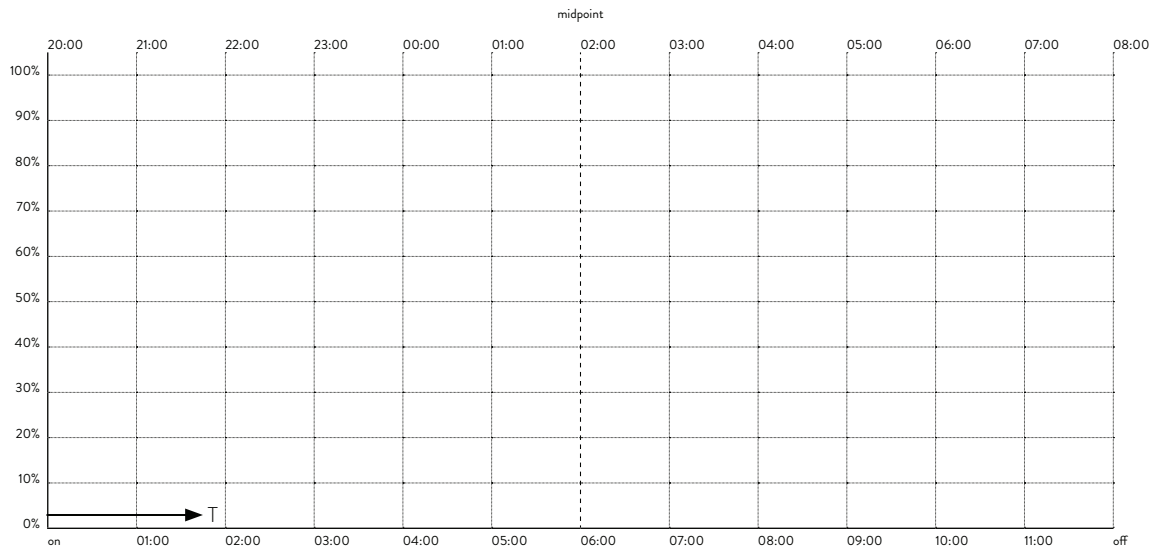

- From the time the luminaires are switched on. Programming is shortened or lengthened only at the end of the schedule times.*

- Keep light flux constant throughout the life of the luminaire?

* Switching on and off is performed by the electrical power supply panel switch.

Requestor data and signature

Requestor name		Simon office name	
Requestor signature		Office signature	
Attach a copy of this document to the purchase order		Technical Acceptance	